Automatic Washbasin Tap for Non-pressure Water Heaters SLU 01NH






Characteristics





- economical aerator, rate of flow 6 l/min
- hygienic flush
- is destined for connection to the non-pressure water heater under the washbasin
- water is flowing as long as hands are in the active range
- water stops flowing after removal of hands from the active range of sensor after adjustable time delay (can be set in range 0.25 - 7.75 s)
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03

Installation Drawing

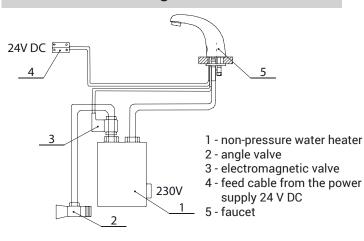

Technical Specification

Operating voltage

SLU 01NH	24 V DC
■ SLU 01NHB	6 V
Power input	
operating by 24 V DC	7 W
operating by 6 V	3 W

Water temperature regulation

Battery life

4 pcs. AA alkaline batteries approx. 2 years AA, 1,5 V, 2700 mAh (100 uses per day)

Active range

standard 0,13 - 0,19 m START/STOP program 0,05 - 0,15 m Recommended flow pressure 0,1 - 0,6 MPa Rate of flow 6 l/min. (inf. data) Water inlet male thread G 1/2"

on a water heater

Supply Specification

SLU 01NH - Supply No. 33011 faucet with an electronics, electromagnetic valve (1 pc.), connecting hoses, SLU 01NHB - Supply No. 33012

angle valve with filter and check valve (1 pc.), 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case (SLU 01NHB)

Recommended Accessories

SLZ 01Y	-	Supply No. 05012	power supply 24 V DC for operating of max. 5 ks pcs. of washbasin taps
SLZ 01Z	-	Supply No. 05011	power supply 24 V DC for operating of max. 9 ks pcs. of washbasin taps
SLZ 04Y	-	Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of washbasin taps
SLZ 04Z	-	Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of washbasin taps
SLZ 04X	-	Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of washbasin taps

Supply No. 10049 power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of washbasin taps **SLZ 06** power supply 24 V DC for operating of max. 1 pc. of washbasin tap

Supply No. 05060

SLD 03 Supply No. 07030 remote control for an adjustment of parameters

set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B) **SLA 36 Supply No. 06360**