

# Stainless Steel Automatic Washing Troughs SLUN 50E, SLUN 51E, SLUN 52E, SLUN 53E




SLUN 50E

## Characteristics



- economical aerator, rate of flow 6l/min
- hygienic flush
- suitable for medical facilities
- stainless steel floor standing washing troughs with integrated electronics
- vandal-proof stainless steel spouts and sensing heads
- SLUN 50E, ET - length 1250 mm (2 pcs. of electronics)
- SLUN 51E, ET - length 1900 mm (3 pcs. of electronics)
- SLUN 52E, ET - length 2500 mm (4 pcs. of electronics)
- SLUN 53E, ET - length 3000 mm (5 pcs. of electronics)
- water is flowing as long as hands are in the active range
- water stops flowing after removal of hands from the active range of sensor after adjustable time delay (can be set in range 0,25 - 7,75 s)
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03
- temperature is regulated by angle valves (for models with index E) or by thermostatic valve (for models with index ET)
- different lenghts could be made to order
- material AISI - 304
- could be made to order from stainless steel AISI - 316L
- brushed finish

## Dimensions

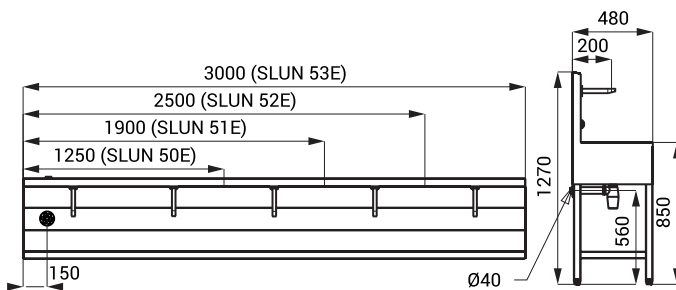

## Technical Specification

<b>Operating voltage</b>	24 V DC
<b>Power input</b>	
▪ SLUN 50E	14 W
▪ SLUN 51E	20 W
▪ SLUN 52E	27 W
▪ SLUN 53E	33 W
<b>Active range</b>	0,23 - 0,31 m
<b>Recommended flow pressure</b>	0,1 - 0,6 MPa
<b>Rate of flow</b>	6 l/min. (inf. data)
<b>Water inlet</b>	male thread G 1/2"

## Supply Specification

SLUN 50E - Supply No. 93501	stainless steel washing trough with electronics and spouts, electromagnetic valve
SLUN 51E - Supply No. 93511	(pcs. according to number of electronics), connecting hoses, angle valve with filter
SLUN 52E - Supply No. 93521	and check valve (2 pcs.), siphon, thermostatic valve (for models with index ET)
SLUN 53E - Supply No. 93531	
SLUN 50ET - Supply No. 93503	
SLUN 51ET - Supply No. 93513	
SLUN 52ET - Supply No. 93523	
SLUN 53ET - Supply No. 93533	

## Recommended Accessories

SLZ 01Y - Supply No. 05012	power supply 24 V DC for operating of max. 4 pcs. of spouts
SLZ 01Z - Supply No. 05011	power supply 24 V DC for operating of max. 8 pcs. of spouts
SLZ 04Y - Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 4 pcs. of spouts
SLZ 04Z - Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 8 pcs. of spouts
SLZ 04X - Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 14 pcs. of spouts
SLD 03 - Supply No. 07030	remote control for an adjustment of parameters
SLA 56A - Supply No. 06560	economical aerator 3,8 l/min
SLA 56B - Supply No. 06561	economical aerator 1,9 l/min