


Automatic Toilet Flushing Unit for Geberit Mounting Frames SLW 02GT



Characteristics

- flushing unit destined for Geberit mounting frames KOMBIFIX: 110.367.00.5, 110.300.00.5, DUOFIX SPECIAL: 111.355.00.5, DUOFIX: 111.300.00.5, 111.367.00.5, 111.350.00.5, 111.390.00.5
- system reacts to the user attendance in active range of the sensor at a maximum distance of 0,7 m, minimum stay time in active range is 7,5 s
- water flows after the user leaves active range
- flushing time 6 s
- possibility of additional manual flush by push-button (f.e. during the cleaning)
- automatic hygiene flush after each 8 use of toilet and after 24 hours non-use
- parameters adjustment by remote control SLD 03

Dimensions

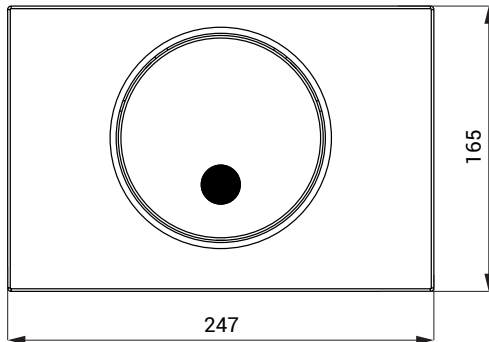

Technical Specification

Flush plate dimension	247 x 165 mm
Operating voltage	24 V DC
Power input	51 W
Active range	0,63 - 0,75 m

Supply Specification

SLW 02GT - Supply No. 14022 stainless steel flush plate SIGMA 10 with electronics, stainless steel holder of electromagnet, electromagnet

Recommended Accessories

- SLZ 01Z - Supply No. 05011 power supply 24 V DC for operating of max. 2 pcs. of flushing units
- SLZ 04Z - Supply No. 05041 power supply 24 V DC for DIN rail, for operating of max. 2 pcs. of flushing units
- SLZ 04X - Supply No. 10049 power supply 24 V DC for DIN rail, for operating of max. 3 pcs. of flushing units
- SLD 03 - Supply No. 07030 remote control for an adjustment of parameters