


# Automatic Toilet Flushing Units for SLR 21 SLW 02N



## Characteristics

- **SLW 02N** - flushing unit destined for SLR 21, stainless steel
- system reacts to the user attendance in active range of the sensor at a maximum distance of 0,7 m, minimum stay time in active range is 7,5 s
- water flows after the user leaves active range
- **„short flushing“ (2 s)**  
= min. stay time in active range is 7,5 s, max. stay time is 45 s
- **„long flushing“ (5 s)**  
= min. stay time in active range is 45 s
- possibility of additional manual flush by push-button (f.e. during the cleaning)
- automatic hygiene flush after each 8 use of toilet and after 24 hours non-use
- parameters adjustment by remote control SLD 03

## Dimensions

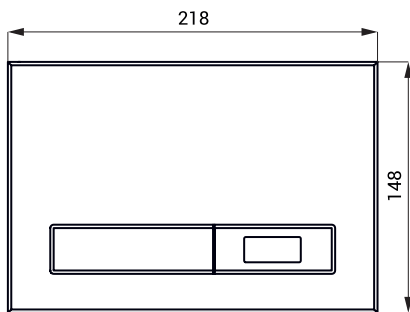

## Technical Specification

Flush plate dimension	218 x 148 mm
Operating voltage	24 V DC
Power input	13 W
Active range	0,6 - 0,75 m

## Supply Specification

SLW 02N - Supply No. 04022 flush plate (stainless steel) with electronics, control mechanism with servomotor

## Recommended Accessories

SLZ 01Y - Supply No. 05012	power supply 24 V DC for operating of max. 2 pcs. of flushing units
SLZ 01Z - Supply No. 05011	power supply 24 V DC for operating of max. 4 pcs. of flushing units
SLZ 04Y - Supply No. 05042	power supply 24 V DC on DIN rail, for operating of max. 2 pcs. of flushing units
SLZ 04Z - Supply No. 05041	power supply 24 V DC on DIN rail, for operating of max. 4 pcs. of flushing units
SLZ 04X - Supply No. 10049	power supply 24 V DC on DIN rail, for operating of max. 7 pcs. of flushing units
SLD 03 - Supply No. 07030	remote control for an adjustment of parameters
SLR 21 - Supply No. 08210	mounting frame with concealed tank for wall hung toilets, for installation to the plasterboard and brick wall