


Valves distributor on DIN rail

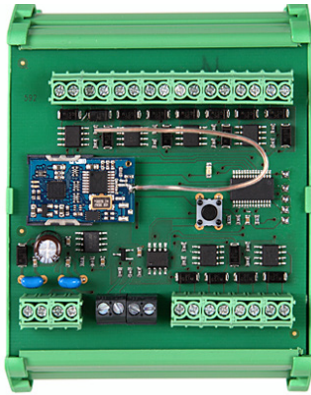

SLZA 15

Characteristics

- necessary for use in set with SLZA 02xx
- placed on DIN rail into the switchboard


Technical Specification

Operating voltage	24 V DC
Power input	max. 1 W + (1-12 depends on the number of valves * 6,5 W)

Supply Specification

SLZA 15 - Supply No. 88150 valves distributor

Push buttons distributor on DIN rail

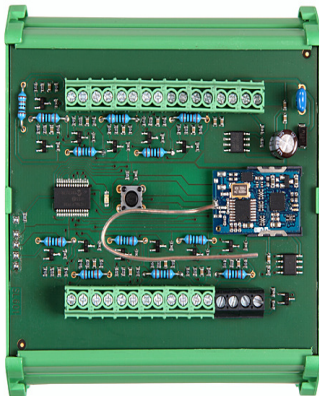

SLZA 17

Characteristics

- necessary for use in set with SLZA 02xx
- connecting with max. 12 buttons
- arrange connection between piezo buttons on the shower panels and shower timer
- placed on DIN rail into the switchboard

Technical Specification

Operating voltage	24 V DC
Power input	max. 2 W

Supply Specification

SLZA 17 - Supply No. 88170 push buttons distributor

Contacter 24 V DC



SLZA 53

Characteristics

- possible for use in set with SLZA 41xx or SLZA 04xx
- change power load 230 V AC into 20 A
- is placed on DIN rail into the switchboard

Technical Specification

Operating voltage	24 V DC
Switching voltage	230 V AC
Max. switched current	20 A
Number of switched contacts	1

Supply Specification

SLZA 53 - Supply No. 88530 contactor 24 V DC