

Coin and Token Machines for Single-phase Appliance 230 V SLZA 41, SLZA 41Z



SLZA 41




SLZA 41Z

Characteristics

- **vandal-proof**
- coin and token machine for single-phase appliance 230 V
- after inserting the minimal requested credit (coin or token) the machine switches on the contactor of single-phase appliance (e. g. washing machine) for paid time
- during use is possible to add the coins or tokens and prolong use time
- index Z - recessed
- parameters adjustment on display inside of the machine using by the remote control SLD 05 (value of purchased time, current euro exchange rate)
- lockable
- material AISI - 304
- could be made to order from stainless steel AISI - 316L
- brushed finish

Installation Drawing

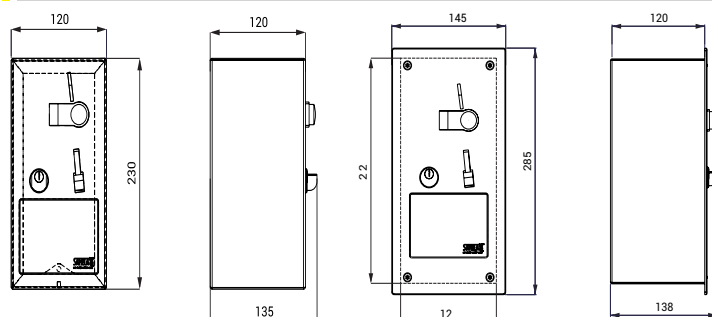

SLZA 41

SLZA 41Z

Technical Specification

Dimension of hole in the wall for models with index Z	265 x 127 x 125 mm
Operating voltage	24 V DC
Max. contactor input	4 kW
Power input in sleep mode	2,5 W
Types of coins	5, 10, 20 and 50 CZK, 1 and 2 EUR, metal token
Delay time for paid 5 CZK	30 s - 16 h, standard 30 s

Supply Specification

SLZA 41	- Supply No. 88410	stainless steel coin machine with electronics, coin holder and coin box, set of keys (2 pcs.)
SLZA 41Z	- Supply No. 88411	stainless steel coin machine with electronics, coin holder and coin box, set of keys (2 pcs.), mounting frame

Recommended Accessories

SLZ 01Y	- Supply No. 05012	power supply 24 V DC for operating of max. 1 pc. of machine
SLZ 01Z	- Supply No. 05011	power supply 24 V DC for operating of max. 3 pcs. of machines
SLZ 04Y	- Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 1 pc. of machine
SLZ 04Z	- Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 3 pcs. of machines
SLZ 04X	- Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of machines
SLD 05	- Supply No. 07050	remote control for an adjustment of parameters
SLZA 50	- Supply No. 88500	set of 50 pcs. of tokens for coin machine
SLZA 53	- Supply No. 88530	contactor 24 V DC