# Automatic Device for Door Lock, Multiple Payment Methods SLZA 43AV





### **Characteristics**








- includes Bluetooth control (paid Sanela control app available for download)
- for disabled and persons with limited mobility
- vandal-proof
- automatic device for door lock, with multiple payment methods, 1 - 4 Door locks
- door lock selection is made on the display of the payment terminal
- payment with coins, tokens, RFID tokens, contactless payment card, Google Pay or Apple Pay
- the device adds up the coins but does not return
- after payment the selected door lock opens for adjusted time
- automatic notification when the cash register is full as an option
- parameter setting and communication with the electronics via the Sanela Control app (Bluetooth)
- with eurolock
- lockable
- for indoor use, temperature range +5 to +40 °C
- material stainless steel AISI 304 (1.4301)
- brushed finish

### **Installation Drawing**



- 1 credit card reader
- 2 status indicator
- 3 RFID token credit value reader
- 4 coin box
- 5 eurolock

### **Technical Specification**

Dimensions Weight

Thickness of material

the front cover

box

Operating voltage
Power input in sleep mode
Total power consumption

of 1 door lock

Total power consumption of 2 door locks

Accepted coins

Accepted coms

Adjustable time for unlocking Adjustable minimum value

for unlocking

320 x 240 x 160 mm

8,95 kg

3 mm 1,5 mm 24 V DC

8 W

16 W

24 W

0,5, 1 and 2 EUR

1 - 310 sec.

1 -19 €, standard 1 €


### **Supply Specification**

**SLZA 43AV - Supply No. 88439** 

stainless steel payment device with electronics including Bluetooth module, coin box, coin holder, credit card reader, RFID token credit value reader, set of keys (2 pcs.), SW door opener, eurolock with eurokey

## **Recommended Accessories**

SLZ 01Y - Supply No. ( SLZ 01Z - Supply No. ( SLZ 04Y - Supply No. (	power supply 24 V DC for operating of max. 2 pcs. of devices and 6 pcs. of door locks
SLZ 04Z - Supply No. (	power supply 24 V DC for DIN rail, for operating of max. 2 pcs. of devices and 6 pcs. of door locks
SLZ 04X - Supply No.	power supply 24 V DC for DIN rail, for operating of max. 3 pcs. of devices and 9 pcs. of door locks
SLZA 30 - Supply No. 8	39300 programming station for RFID tokens
SLZA 30C - Supply No. 8	39301 RFID token credit value reader
SLZA 30CZ - Supply No. 8	39302 RFID token credit value reader - recessed
SLZA 38 - Supply No. 8	39380 programming station for RFID tokens
SLZA 50 - Supply No. 8	38500 set of 50 pcs. of tokens for coin device
SLZA 51 - Supply No. 8	• • • • • • • • • • • • • • • • • • • •
SLZA 51B - Supply No. 8	
SLZA 51R - Supply No. 8	
	(logo on the token is not possible)
SLZA 55 - Supply No. 8	
SLZA 58 - Supply No. 8	,
SANELA CONTROL APP	paid Sanela Control app available for download on the App Store and Google Play

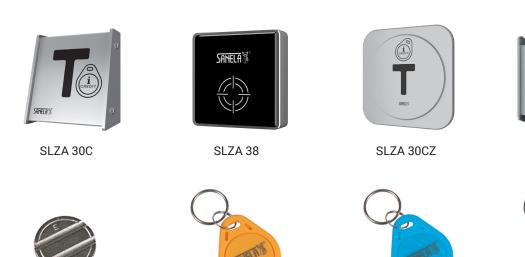



SLZA 55



SLZA 30

1 pc. from set of 50 pcs.

tokens SLZA 51R

1 pc. from set of 50 pcs.

tokens SLZA 51B

# **Multiple Payment Devices**

### **NAYAX Terminal Usage Terms**

- Signing the document "Service Provision Agreement" with the representative for the respective country
- Online completion of the "Client Agreement" document for Nayax (setting up the bank account details)
- Online completion of the "KYC Form" for Nayax (client verification aimed at preventing money laundering, financial fraud, and terrorism financing

### Costs associated with using the NAYAX terminal

(The fee and currency depend on the country of use)

- One-time registration fee:
- Monthly fees:

Service fee: (includes terminal operation, access to the online user system, and remote technical support)
Bank fee for payment transfers:

Clearing fee for payment processing: x% of the payment volume