

Coin and Token Shower Timers for One to Three Showers SLZA 01LM, SLZA 01LMZ



SLZA 01LM




SLZA 01LMZ

Characteristics





- **hygienic flush**
- **vandal-proof**
- **choice of shower by the user**
 - before inserting a coin or token the user chooses the requested shower by the push button, the number of shower is shown on the display
- **direct control**
 - after inserting a coin or a token the machine starts water flow on several seconds to indicate the chosen shower
 - after set delay the machine starts water flow for paid time
- **30 s before the end of water supply the user is warned by interrupting of water flow**
- **index Z - recessed**
- **parameters adjustment using by the remote control SLD 05 (adjustment of shower time according to the thrown coin or token, time delay of switch on, time value, current euro exchange, token value, display contrast, possibility switch off some from showers)**
- **marking of the buttons by symbols could be made to order**
- **the possibility of obtaining the statistical information, device diagnostics**
- **lockable**
- **material AISI - 304**
- **could be made to order from stainless steel AISI - 316L**
- **brushed finish**


Installation Drawing

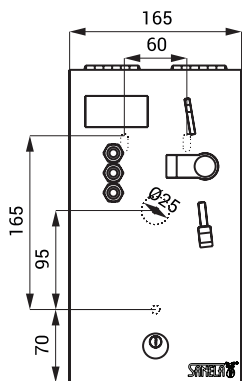

SLZA 01LM

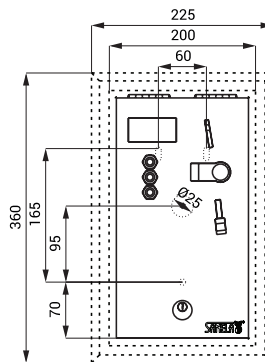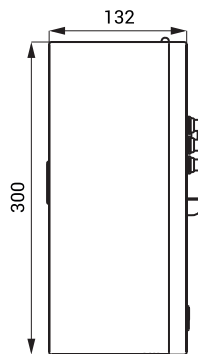

SLZA 01LMZ



Technical Specification

Dimension of hole in the wall for models with index Z

335 x 200 x 125 mm

Operating voltage

24 V DC

Power input

26 W

(depends on the accessories and the number of showers)

Types of coins

5, 10, 20 and 50 CZK,
1 and 2 EUR, metal token

Time delay of switch on

0 - 255 s, standard 30 s

Delay time for paid 5 CZK

0 - 255 s, standard 30 s

Supply Specification

- SLZA 01LM** - Supply No. 88015 stainless steel coin machine with electronics, coin holder and coin box, set of keys (2 pcs.)
- SLZA 01LMZ** - Supply No. 88016 stainless steel coin machine with electronics, coin holder and coin box, set of keys (2 pcs.), mounting frame

Necessary Accessories



SLZA 20	88200	Shower control without piezo button - premixed water
----------------	--------------	---



SLZA 20H	88205	Shower control without piezo button - for cold and hot water, temperature regulated by mixer
-----------------	--------------	---



SLZA 20T	88206	Shower control without piezo button - for cold and hot water, temperature regulated by thermostatic mixer
-----------------	--------------	--



SLZA 21	88210	Stainless steel shower panel without piezo button - premixed water
----------------	--------------	--



SLZA 21H	88215	Stainless steel shower panel without piezo button - for cold and hot water, temperature regulated by mixer
-----------------	--------------	--



SLZA 21T	88216	Stainless steel shower panel without piezo button - for cold and hot water, temperature regulated by thermostatic mixer
-----------------	--------------	---

Recommended Accessories

SLZA 50	- Supply No. 88500	set of 50 pcs. of tokens for coin machine
SLZ 01Y	- Supply No. 05012	power supply 24 V DC for operating of max. 5 pcs. of showers
SLZ 01Z	- Supply No. 05011	power supply 24 V DC for operating of max. 9 pcs. of showers
SLZ 04Y	- Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
SLZ 04Z	- Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers
SLZ 04X	- Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers
SLD 05	- Supply No. 07050	remote control for an adjustment of parameters
SLA 03	- Supply No. 06030	vandal-proof shower head
SLA 39	- Supply No. 06390	vandal-proof shower head
SLA 40	- Supply No. 06400	vandal-proof shower head with possibility to set an angle of water flow