

Automatic Stainless Steel Wall-mounted Central Soap Dispensers SLZN 83ER2 - 83ER6




SLZN 83E


Characteristics

- including the mounting frame SLR 24
- easy soap refilling
- soap economy
- one dose of soap is flowing as hands are in the active range of the sensor (can be set in range 1,3 - 13 s), standard 2,6 s
- possibility of delivery 2 - 6 pcs. of soap dispensers with central unit made to order
- use in the public sector; container for soap 6 l
- parameters adjustment using by the remote control SLD 03

Installation Drawing

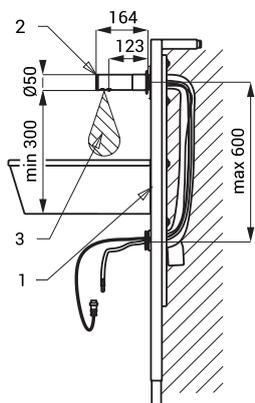

- 1 - mounting frame with soap supply and power supply 24 V DC in security tube
- 2 - stainless steel spout
- 3 - active range

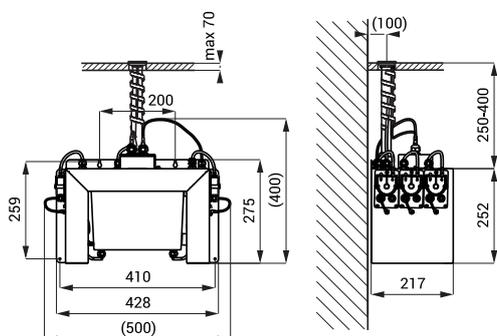

Technical Specification

Operating voltage	230 V AC
Power input	
SLZN 83ER2	5 W
SLZN 83ER3	7 W
SLZN 83ER4	9 W
SLZN 83ER5	12 W
SLZN 83ER6	14 W
Active range	0,11 - 0,15 m
Recommended soap viscosity	10 mPa*s - 5000 mPa*s
(don't use chemical solvents and disinfection)	

mounting frame SLR 24



central soap dispenser with soap container 6 l

Supply Specification

SLZN 83ER2 - Supply No. 85812	stainless steel spout with electronics (2 pcs.), grip plate, inlet hoses and cables in a protective tube 80 cm, central soap dispenser with peristaltic pumps for liquid soap and soap container 6 l, mounting frame SLR 24 (2 pcs.), power supply SLZ 01Y, remote control SLD 03
SLZN 83ER3 - Supply No. 85813	stainless steel spout with electronics (3 pcs.), grip plate, inlet hoses and cables in a protective tube 80 cm, central soap dispenser with peristaltic pumps for liquid soap and soap container 6 l, mounting frame SLR 24 (3 pcs.), power supply SLZ 01Y, remote control SLD 03
SLZN 83ER4 - Supply No. 85814	stainless steel spout with electronics (4 pcs.), grip plate, inlet hoses and cables in a protective tube 80 cm, central soap dispenser with peristaltic pumps for liquid soap and soap container 6 l, mounting frame SLR 24 (4 pcs.), power supply SLZ 01Y, remote control SLD 03
SLZN 83ER5 - Supply No. 85815	stainless steel spout with electronics (5 pcs.), grip plate, inlet hoses and cables in a protective tube 80 cm, central soap dispenser with peristaltic pumps for liquid soap and soap container 6 l, mounting frame SLR 24 (5 pcs.), power supply SLZ 01Y, remote control SLD 03
SLZN 83ER6 - Supply No. 85816	stainless steel spout with electronics (6 pcs.), grip plate, inlet hoses and cables in a protective tube 80 cm, central soap dispenser with peristaltic pumps for liquid soap and soap container 6 l, mounting frame SLR 24 (6 pcs.), power supply SLZ 01Y, remote control SLD 03