

Coin and Token Machines for 1 to 8 Single-phases Appliances 230 V AC SLZA 04L, SLZA 04LZ



SLZA 04L




SLZA 04LZ

Characteristics





- vandal-proof
- choice of appliance by the user
- before inserting a coin or token the user chooses the requested appliance, the number of appliance is shown on the display, the device switches on the contactor of single-phase appliance (e. g. washing machine) for paid time
- during use is possible to add the coins or tokens and pro long use time
- the device adds up the coins but does not return
- index Z - recessed
- parameters adjustment using by the remote control SLD 05 (appliances running time according to the thrown coin or token, time value, current euro exchange, display contrast, possibility turn off one from appliances)
- marking of the buttons by symbols could be made to order
- the possibility of obtaining the statistical information, device diagnostics
- lockable
- for indoor use, temperature range +5 to +40 °C
- material stainless steel AISI 304 (1.4301)
- brushed finish


Installation Drawing

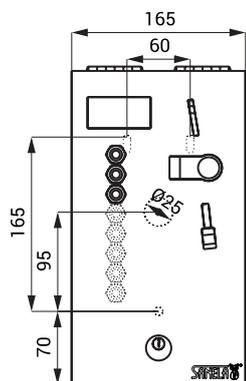

SLZA 04L

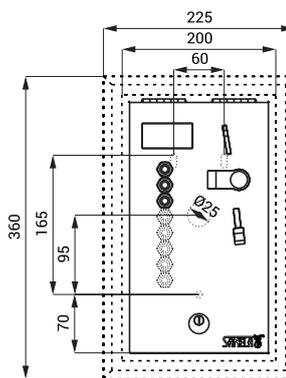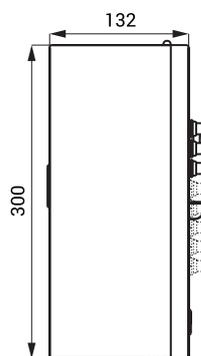

SLZA 04LZ

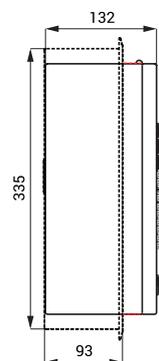

Technical Specification

Niche dimensions (index Z)	335 x 200 x 125 mm
Dimensions	
▪ SLZA 04L	300 x 165 x 132 mm
▪ SLZA 04LZ	360 x 225 x 132 mm
Weight	
▪ SLZA 04L	4,5 kg
▪ SLZA 04LZ	6,2 kg
Thickness of material	1,5 mm
Operating voltage	24 V DC
Power input	30 W (depends on the accessories and the number of appliances)
Accepted coins	1 and 2 €, token (other currencies on request)
Delay time for paid 1 €	30 sec. - 16 h, standard 30 sec.
Maximal power input of contactor	4 kW

Supply Specification

- SLZA 04L - Supply No. 88040 stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.)
- SLZA 04LZ - Supply No. 88041 stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.), mountig frame

Required Accessories



SLZA 15	88150	Conectors distributor on DIN rail
---------	-------	-----------------------------------



SLZA 53	88530	Contactora 24 V DC
---------	-------	--------------------

Recommended Accessories

- SLZ 01Y - Supply No. 05012 power supply 24 V DC for operating of max. 8 pcs. of appliances / 1 pc. of device
- SLZ 01Z - Supply No. 05011 power supply 24 V DC for operating of max. 16 pcs. of appliances / 2 pcs. of devices
- SLZ 04Y - Supply No. 05042 power supply 24 V DC for DIN rail, for operating of max. 8 pcs. of appliances / 1 pc. of device
- SLZ 04Z - Supply No. 05041 power supply 24 V DC for DIN rail, for operating of max. 16 pcs. of appliances / 2 pcs. of devices
- SLZ 04X - Supply No. 10049 power supply 24 V DC for DIN rail, for operating of max. 32 pcs. of appliances / 4 pcs. of devices
- SLD 05 - Supply No. 07050 remote control for an adjustment of parameters
- SLZA 50 - Supply No. 88500 set of 50 pcs. of tokens for coin device