

Coin and Token Shower Timers for Four to Eight Showers

SLZA 02LM, SLZA 02LMZ



SLZA 02LM




SLZA 02LMZ

Characteristics





- **hygienic flush**
- **vandal-proof**
- **choice of shower by the user**
 - before inserting a coin or token the user chooses the requested shower by the push button, the number of shower is shown on the display
- **direct control**
 - after inserting a coin or a token the device starts water flow on several seconds to indicate the chosen shower
 - after set delay the device starts water flow for paid time
 - 30 s before the end of water supply the user is warned by interrupting of water flow
 - the device adds up the coins but does not return
 - index Z - recessed
 - parameters adjustment using by the remote control SLD 05 (adjustment of shower time according to the thrown coin or token, time delay of switch on, possible activation of hygienic flush, current euro exchange, token value, display contrast, possibility switch off some from showers)
 - marking of the buttons by symbols could be made to order
 - the possibility of obtaining the statistical information, device diagnostics
- lockable
- for indoor use, temperature range +5 to +40 °C
- material stainless steel AISI 304 (1.4301)
- brushed finish


Installation Drawing

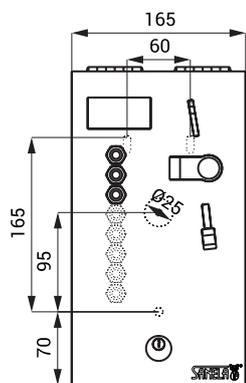

SLZA 02LM

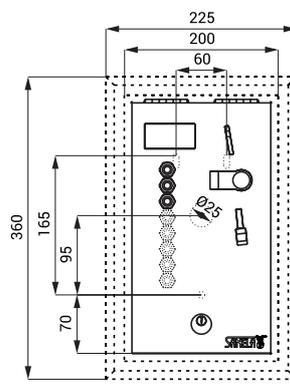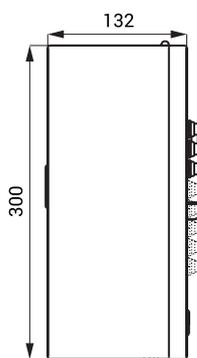

SLZA 02LMZ

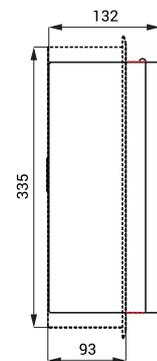

Technical Specification

Niche dimensions (index Z)	335 x 200 x 125 mm
Dimensions	
▪ SLZA 02LM	300 x 165 x 132 mm
▪ SLZA 02LMZ	360 x 225 x 132 mm
Weight	
▪ SLZA 02LM	4,04 kg
▪ SLZA 02LMZ	6,2 kg
Thickness of material	1,5 mm
Operating voltage	24 V DC
Power input	65 W (depends on the accessories and the number of showers)
Accepted coins	1 and 2 €, token (other currencies on request)
Switch on delay	0 - 255 sec., standard 30 sec.
Showering time	5 - 1200 sec.

Supply Specification

- SLZA 02LM** - Supply No. 88027 stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.)
- SLZA 02LMZ** - Supply No. 88028 stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.), mounting frame

Required Accessories



SLZA 15	88150	Valves distributor on DIN rail
----------------	--------------	--------------------------------



SLZA 20	88200	Shower control without piezo button - premixed water
----------------	--------------	---



SLZA 20H	88205	Shower control without piezo button - for cold and hot water, temperature regulated by mixer
-----------------	--------------	---



SLZA 20T	88206	Shower control without piezo button - for cold and hot water, temperature regulated by thermostatic mixer
-----------------	--------------	--

- thermostatic valve nut spanner SLA 64



SLZA 21	88210	Stainless steel shower panel without piezo button - premixed water
----------------	--------------	--



SLZA 21H	88215	Stainless steel shower panel without piezo button - for cold and hot water, temperature regulated by mixer
-----------------	--------------	--



SLZA 21T

88216

Stainless steel shower panel without piezo button - for cold and hot water, temperature regulated by thermostatic mixer

Recommended Accessories

SLZ 01Y	-	Supply No. 05012	power supply 24 V DC for operating of max. 5 pcs. of showers
SLZ 01Z	-	Supply No. 05011	power supply 24 V DC for operating of max. 9 pcs. of showers
SLZ 04Y	-	Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
SLZ 04Z	-	Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers
SLZ 04X	-	Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers
SLD 05	-	Supply No. 07050	remote control for an adjustment of parameters
SLA 03	-	Supply No. 06030	vandal-proof shower head
SLA 39	-	Supply No. 06390	vandal-proof shower head
SLA 40	-	Supply No. 06400	vandal-proof shower head with possibility to set an angle of water flow
SLA 64	-	Supply No. 06640	thermostatic valve nut spanner (SLZA 20T)
SLZA 50	-	Supply No. 88500	set of 50 pcs. of tokens for coin device