

Coin and Token Shower Timers for One Shower

SLZA 03N, SLZA 03NZ



SLZA 03N




SLZA 03NZ

Characteristics



- hygienic flush
- vandal-proof
- interactive control
 - after inserting a coin or a token the device starts water flow on several seconds in the shower
 - the user can start and stop the water directly in the shower
- 30 s before the end of water supply the user is warned by interrupting of water flow
- the device adds up the coins but does not return
- index Z - recessed
- parameters adjustment using by the remote control SLD 05 (adjustment of shower time according to the thrown coin or token, time delay of switch on, possible activation of hygienic flush, current euro exchange, token value)
- lockable
- for indoor use, temperature range +5 to +40 °C
- material stainless steel AISI 304 (1.4301)
- brushed finish

Installation Drawing

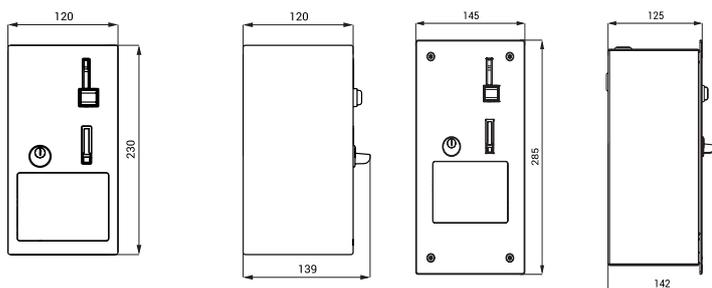

SLZA 03N

SLZA 03NZ

Technical Specification

Niche dimensions (index Z)	265 x 127 x 125 mm
Dimensions	
▪ SLZA 03N	230 x 139 x 120 mm
▪ SLZA 03NZ	285 x 145 x 142 mm
Weight	
▪ SLZA 03N	4,5 kg
▪ SLZA 03NZ	6,2 kg
Thickness of material	1,5 mm
Operating voltage	24 V DC
Power input	10 W (2,5 W in sleep mode)
Accepted coins	1 and 2 €, token (other currencies on request)
Switch on delay	0 - 300 sec., standard 30 sec.
Showering time	5 - 1200 sec.

Supply Specification

- SLZA 03N - Supply No. 88033** stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.)
- SLZA 03NZ - Supply No. 88034** stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.), mounting frame

Required Accessories



SLZA 20P

88207

Shower control with piezo button
- premixed water



SLZA 20PH	88208	Shower control with piezo button - for cold and hot water, temperature regulated by mixer
------------------	--------------	--



SLZA 20PT	88209	Shower control with piezo button - for cold and hot water, temperature regulated by thermostatic mixer <i>- thermostatic valve nut spanner SLA 64</i>
------------------	--------------	---



SLZA 21P	88217	Stainless steel shower panel with piezo button - premixed water
-----------------	--------------	--



SLZA 21PH	88218	Stainless steel shower panel with piezo button - for cold and hot water, temperature regulated by mixer
------------------	--------------	--



SLZA 21PT	88219	Stainless steel shower panel with piezo button - for cold and hot water, temperature regulated by thermostatic mixer
------------------	--------------	---

Recommended Accessories

SLZ 01Y	- Supply No. 05012	power supply 24 V DC for operating of max. 1 pc. of shower
SLZ 01Z	- Supply No. 05011	power supply 24 V DC for operating of max. 3 pcs. of showers
SLZ 04Y	- Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 1 pc. of shower
SLZ 04Z	- Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 3 pcs. of showers
SLZ 04X	- Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
SLD 05	- Supply No. 07050	remote control for an adjustment of parameters
SLA 64	- Supply No. 06640	thermostatic valve nut spanner (SLZA 20PT)
SLZA 50	- Supply No. 88500	set of 50 pcs. of tokens for coin device