


# Radars Flushing Unit for urinals Geberit Selnova S, L, M SLP 92B




## Characteristics



- radar flushing unit for urinals:  
Selnova S (Geberit) no. 503.105.00.1  
Selnova L (Geberit) no. 503.135.00.1  
Selnova M (Geberit) no. 503.125.00.1
- includes Bluetooth control (paid Sanela Control app available for download)
- economical flushing with one liter of water
- easy installation using a template
- the entire flushing system is located behind the urinal
- responds only to urinal use (evaluates changes, that occur inside the urinal during fluid flow)
- flush time is adjustable from 0.5 to 15.5 s
- parameter setting and communication with electronics via Sanela Control app (Bluetooth) or the SLD 04 remote control (acoustic indication of adjustment) without dismantling the urinal
- automatic flushing 6 hours after the last activation of the valve
- battery status monitoring
- possibility to regulate water flow with an angle valve
- after flushing, the flush valve performs a short water refill into the siphon
- the product meets the water consumption parameters for class 1 according to the criteria of the EU Water Label program

## Installation Drawing

### SLP 92 SELNOVA S, L, M

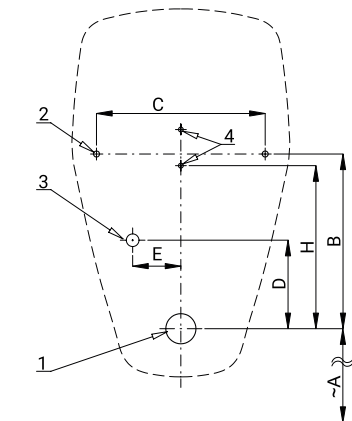

- 1 - waste pipe Ø 50 mm
- 2 - 2x hole for fitting
- 3 - water supply G 1/2"
- 4 - holes for mounting electronics

Dimensions (mm)	A	B	C	D	E	F	H
SLP 92 SELNOVA S	380	250	290	140	80	420	290
SLP 92 SELNOVA L	450	300	255	130	70	390	210
SLP 92 SELNOVA M	480	225	220	130	70	315	210

\* for the height of the front edge of the urinal 700 mm above the floor

## Technical Specification

Operating voltage	6 V
Power input	3 W
Recommended flow pressure	0.1 - 0.6 MPa
Flow rate	18 l/min (informative value)
Water inlet	external thread G 1/2"
Water outlet	inlet fitting with gasket

Illustrative photo:



SLA 11



SLA 11A



SLA 11B



SLA 11C

## Supply Specification

**SLP 92B - Supply No. 01922** radar flushing unit including Bluetooth module on mounting rail, solenoid valve, connecting hose, angle valve with filter and check valve, inlet fitting with a rubber sealing siphon, installation template, 4 pcs. AA alkaline batteries 1.5 V, 2700 mAh with holder

## Recommended accessories

**SLD 04 - Supply No. 07040** remote control for an adjustment of parameters  
**SLA 11 - Supply No. 06110** urinal fragrance screen - orange colour, mango scent  
**SLA 11A - Supply No. 06111** urinal fragrance screen - red, kiwi grapefruit scent  
**SLA 11B - Supply No. 06112** urinal fragrance screen - transparent, honeysuckle scent  
**SLA 11C - Supply No. 06113** urinal fragrance screen - blue, cotton flower scent  
**SLR 09 - Supply No. 08090** mounting frame for ceramic urinals with flusher in the urinal or for ceramic washbasins  
**SLA 36 - Supply No. 06360** set of 4 AA alkaline batteries, 1.5 V, 2700 mAh  
**SANELA CONTROL APP** paid Sanela Control app available for download on the App Store and Google Play