Stainless Steel Automatic Washbasins SLUN 71E, SLUN 72E, SLUN 72ET





Characteristics








- economical aerator, rate of flow 6 l/min
- hygienic flush
- vandal-proof
- suitable for prison
- stainless steel wall hung washbasin with infra-red electronics and special anti-suicide spout
- SLUN 71E is destined for cold a premixed water
- SLUN 72E is destined for cold and hot water, temperature is regulated by angle valves
- SLUN 72ET is destined for cold and hot water, temperature is regulated by thermostatic valve
- rear assembling through the service hatch
- water is flowing as long as hands are in the active range
- water stops flowing after removal of hands from the active range of sensor after adjustable time delay (can be set in range 0.25 - 7.75 s)
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03
- material AISI 304
- brushed finish

Dimensions

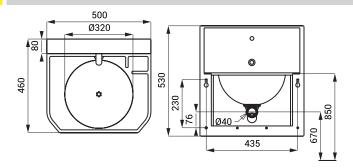

Technical Specification

Operating voltage

 SLUN 71E, 72E, 72ET 24 V DC ■ SLUN 71EB, 72EB, 72ETB 6 V **Power input**

7 W operating by 24 V DC operating by 6 V 3 W **Battery life**

AA, 1,5 V, 2700 mAh Active range

4 pcs. AA alkaline batteries

(100 uses per day) 0,23 - 0,31 m Recommended flow pressure 0,1 - 0,6 MPa Rate of flow 6 l/min. (inf. data) Water inlet male thread G 1/2"

approx. 2 years

Supply Specification

SLUN 71E - Supply No. 93711 SLUN 71EB - Supply No. 93712

stainless steel washbasin with electronics and spout, electromagnetic valve (1 pc.), connecting hoses, angle valve with filter (1 pc.), siphon, mounting set, 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh (SLUN 71EB)

SLUN 72E - Supply No. 93721 **SLUN 72EB** - **Supply No. 93722** stainless steel washbasin with electronics and spout, electromagnetic valve (1 pc.), Y-piece, connecting hoses, angle valve with filter and check valve (2 pcs.), siphon, mounting set, 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh (SLUN 72EB)

SLUN 72ET - **Supply No. 93723** SLUN 72ETB - Supply No. 93724

stainless steel washbasin with electronics and spout, electromagnetic valve (1 pc.), thermostatic valve (1 pc.), connecting hoses, angle valve with filter and check valve (2 pcs.), siphon, mounting set, 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh (SLUN 72ETB)

Recommended Accessories

SLZ 01Y -**Supply No. 05012** power supply 24 V DC for operating of max. 5 pcs. of washbasins SLZ 01Z -Supply No. 05011 power supply 24 V DC for operating of max. 9 pcs. of washbasins SLZ 04Y -**Supply No. 05041** power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of washbasins SLZ 04Z -**Supply No. 05042** power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of washbasins SLZ 04X -Supply No. 10049 power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of washbasins **SLZ 06** power supply 24 V DC for operating of max. 1 pc. washbasin **Supply No. 05060**

SLD 03 Supply No. 07030 remote control for an adjustment of parameters

set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B) **SLA 36 Supply No. 06360** SLA 56A -

Supply No. 06560 economical aerator 3,8 l/min **Supply No. 06561** SLA 56B economical aerator 1,9 l/min