

# Ceramic Urinal with the Radar Flushing Unit SLP 33R




SLP 33 - CASA WITH A COVER

## Characteristics



- economy flushing by 1 liter of water
- easy installation
- whole flushing unit is placed behind the urinal
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameters adjustment by remote control SLD 04 without the necessity to dismantle the urinal from the wall (acoustic setting indication)
- automatic flushing after each 6 hours non-use
- monitoring of battery capacity (for models with index B)
- possibility to regulate a water flow by the ball valve
- radar flushing unit recharges a water to the siphon after each flushing

## Installation Drawing

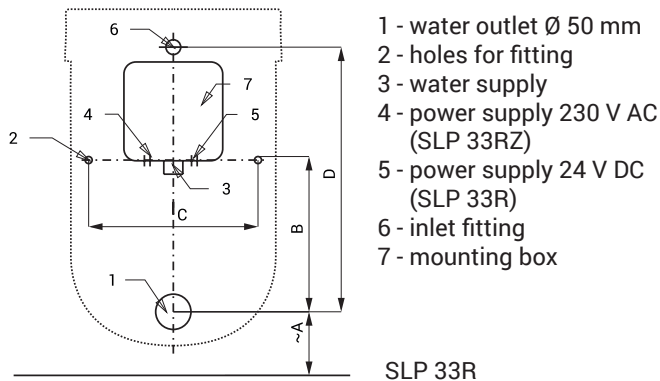

Dimensions (mm)	A	B	C	D
SLP 33 - CASA	415	215	240	375

\* for the height of the front edge of the urinal 650 mm above the floor

## Technical Specification

<b>Mounting box dimension</b>	140 x 140 x 75 mm
<b>Operating voltage</b>	
▪ SLP 33R	24 V DC
▪ SLP 33RZ	230 V AC/50 Hz
▪ SLP 33RB	6 V
<b>Power input</b>	
▪ operating by 24 V DC	8 W
▪ operating by 6 V	3 W
<b>Recommended flow pressure</b>	0,1 - 0,6 MPa
<b>Rate of flow</b>	18 l/min (inf. data)
<b>Water inlet</b>	male thread G 3/4"
<b>Water outlet</b>	inlet fitting with a rubber sealing



## Supply Specification

SLP 33R	- Supply No. 01334	ceramic urinal with the radar flushing unit, plastic mounting box with a brass screw coupling, electromagnetic valve and angle valve, inlet fitting with a rubber
SLP 33RZ	- Supply No. 01335	sealing, siphon, power supply (SLP 33RZ), 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh
SLP 33RB	- Supply No. 11337	with battery case (SLP 31RB)

## Recommended Accessories

SLZ 01Y	- Supply No. 05012	power supply 24 V DC for operating of max. 5 pcs. of flushing units
SLZ 01Z	- Supply No. 05011	power supply 24 V DC for operating of max. 9 pcs. of flushing units
SLZ 04Y	- Supply No. 05042	power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units
SLZ 04Z	- Supply No. 05041	power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units
SLZ 04X	- Supply No. 10049	power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units
SLZ 06	- Supply No. 05060	power supply 24 V DC for operating of max. 1 pc. of flushing unit
SLD 04	- Supply No. 07040	remote control for an adjustment of parameters
SLA 11	- Supply No. 06110	deodorising urinal screen - orange colour, mango scent
SLA 11A	- Supply No. 06111	deodorising urinal screen - red colour, kiwi and grapefruit scent
SLA 11B	- Supply No. 06112	deodorising urinal screen - transparent colour, honeysuckle scent
SLA 11C	- Supply No. 06113	deodorising urinal screen - blue colour, cotton bloom scent
SLR 01	- Supply No. 08010	plasterboard frame for urinal with mounting box behind the urinal
SLA 36	- Supply No. 06360	set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)