

# Ceramic Urinal with the Radar Flushing Unit SLP 35RS




SLP 35 - INKER

## Characteristics



- economy flushing by 1 liter of water
- easy installation by the help of paper drill template
- whole flushing unit is placed behind the urinal
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameters adjustment by remote control SLD 04 without the necessity to dismantle the urinal from the wall (acoustic setting indication)
- automatic flushing after each 6 hours non-use
- monitoring of battery capacity (for models with index B)
- possibility to regulate a water flow by the ball valve
- radar flushing unit recharges a water to the siphon after each flushing

## Installation Drawing

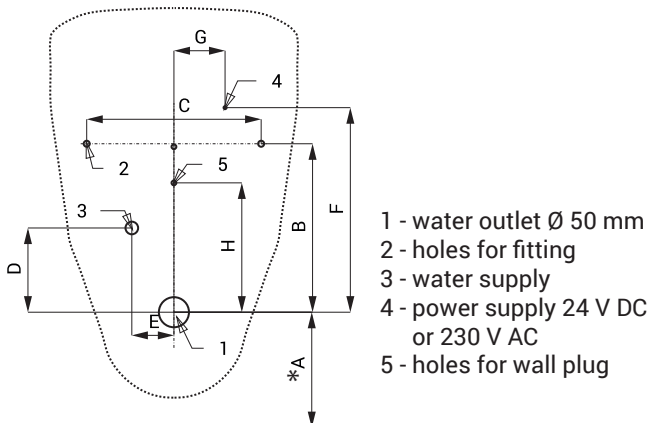

Dimensions (mm)	A	B	C	D	E	F	G	H
SLP 35 - INKER	405	280	290	140	70	340	85	215

\* for the height of the front edge of the urinal 650 mm above the floor

## Supply Specification

- SLP 35RS - Supply No. 11355 ceramic urinal with the radar flushing unit on the mounting rail, electromagnetic valve, connecting hoses, angle valve with filter and check valve, inlet fitting with a rubber sealing, siphon, paper drill template, power supply (SLP 35RZ), 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case (SLP 35RB)
- SLP 35RZ - Supply No. 01355
- SLP 35RB - Supply No. 11357

## Technical Specification

### Operating voltage

- SLP 35RS 24 V DC
- SLP 35RZ 230 V AC/50 Hz
- SLP 35RB 6 V

### Power input

- operating by 24 V DC 8 W
- operating by 6 V 3 W

### Recommended flow pressure

0,1 - 0,6 MPa

### Rate of flow

18 l/min (inf. data)

### Water inlet

male thread G 1/2"

### Water outlet

inlet fitting with a rubber sealing



## Recommended Accessories

- SLZ 01Y - Supply No. 05012 power supply 24 V DC for operating of max. 5 pcs. of flushing units
- SLZ 01Z - Supply No. 05011 power supply 24 V DC for operating of max. 9 pcs. of flushing units
- SLZ 04Y - Supply No. 05042 power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units
- SLZ 04Z - Supply No. 05041 power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units
- SLZ 04X - Supply No. 10049 power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units
- SLZ 06 - Supply No. 05060 power supply 24 V DC for operating of max. 1 pc. of flushing unit
- SLD 04 - Supply No. 07040 remote control for an adjustment of parameters
- SLA 11 - Supply No. 06110 deodorising urinal screen - orange colour, mango scent
- SLA 11A - Supply No. 06111 deodorising urinal screen - red colour, kiwi and grapefruit scent
- SLA 11B - Supply No. 06112 deodorising urinal screen - transparent colour, honeysuckle scent
- SLA 11C - Supply No. 06113 deodorising urinal screen - blue colour, cotton bloom scent
- SLR 01L - Supply No. 08010 plasterboard frame for urinal with mounting box behind the urinal
- SLA 36 - Supply No. 06360 set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)